

08/10/99 Jc674 U.S. PTO

Attorney Docket No.: 3COM-2496.IPG.US.P

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
Patent Application

I hereby certify that this transmittal of the below described documents is being deposited with the United States Postal Service in an envelope bearing Express Mail Postage and an Express Mail label, with the below serial number, addressed to the Commissioner of Patents and Trademarks, Washington, D.C., 20231, on the below date of deposit.			
Express Mail Label No.:	EE801615458US	Name of Person Making the Deposit:	TONY CHOU
Date of Deposit:	08/10/99	Signature of the Person Making the Deposit:	<i>Tony Chou</i>

Jc490 U.S. PTO
09/371463
08/10/99

Inventor(s): Glen H. Lowe, Leslie Thorne and Gary Takushi

Title: A METHOD AND SYSTEM FOR PROVIDING PRIORITY TO A STATION IN A CONGESTED HALF DUPLEX NETWORK

The Commissioner of Patents and Trademarks
Washington, D.C. 20231
Sir:

Transmittal of a Patent Application
(Under 37 CFR §1.53)

Transmitted herewith is the above identified patent application, including:

- ☒ Specification, claims and abstract, totaling 28 pages.
- ☐ Formal drawings, totaling pages.
- ☒ Informal drawings, totaling 4 pages.
- ☒ Declaration and Power of Attorney.
- ☐ Information Disclosure statement.
- ☐ Form 1449
- ☒ Assignment(s)
- ☒ Assignment Recordation Form (duplicate)
- ☐ Preliminary Amendment

FEES DUE

The fees due for filing the specification pursuant to 37 C.F.R. § 1.16 and for recording of the Assignment, if any, are determined as follows:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEES
Basic Application Fee					\$760.00
Total Claims	21	Minus 20=	0	X \$18 =	\$18.00
Independent Claims	3	Minus 3=	0	X \$78=	\$0.00
If multiple dependent claims are presented, add \$260.00					\$0.00
Add Assignment Recording Fee of \$40.00 If Assignment document is enclosed					\$40.00
TOTAL APPLICATION FEE DUE					\$818.00

PAYMENT OF FEES

The full fee due in connection with this communication is provided as follows:

1. Not enclosed

☐ No filing fee is to be paid at this time.

2. Enclosed

☒ Filing fee

☒ Recording assignment

☐ Petition fee for filing by other than all the inventors or person on behalf of the inventor where inventor refused to sign or cannot be reached

☐ For processing an application with specification in a non-English language

☐ Processing and retention fee

☐ Fee for international-type search report

☒ The Commissioner is hereby authorized to charge any additional fees associated with this communication or credit any overpayment to Deposit Account No.: 23-0085. A duplicate copy of this authorization is enclosed.

☒ A check in the amount of \$818.00

☐ Charge any fees required or credit any overpayments associated with this filing to Deposit Account No.: 23-0085.

This application is filed pursuant to 37 C.F.R. § 1.53 in the name of the above-identified Inventor(s).


Please direct all correspondence concerning the above-identified application to the following address:

WAGNER, MURABITO & HAO LLP
Two North Market Street, Third Floor
San Jose, California 95113
(408) 938-9060

☒ This transmittal ends with this page.

Respectfully submitted,

Date: 8/10/99

By: 
James P. Hao
Reg. No. 36,398

United States Patent Application

For

A METHOD AND SYSTEM FOR PROVIDING
PRIORITY TO A STATION IN A CONGESTED
HALF DUPLEX ETHERNET NETWORK

Inventors:

Glen H. Lowe

Leslie Thorne

Gary Takushi

Prepared by:

WAGNER, MURABITO & HAO LLP

Two North Market Street

Third Floor

San Jose, California 95113

(408) 938-9060

CONFIDENTIAL

5

A METHOD AND SYSTEM FOR PROVIDING PRIORITY TO A STATION IN A CONGESTED HALF DUPLEX ETHERNET NETWORK

TECHNICAL FIELD

10 The present invention generally relates to the field of computer networking.
More particularly, the present invention relates to the field of data packet transmissions
within an Ethernet network.

BACKGROUND ART

15 Computers have become an integral tool used in a wide variety of different
applications, such as in finance and commercial transactions, computer-aided design
and manufacturing, health care, telecommunication, education, etc. Computers are
also finding new applications as a result of advances in hardware technology and
rapid development in software technology. Furthermore, a computer system's
20 functionality is dramatically enhanced by coupling stand-alone computers together to
form a computer network. In a computer network, users may readily exchange files,
share information stored on a common database, pool resources, and communicate
via electronic mail (e-mail) and via video conferencing.

One popular type of computer network is known as a local area network (LAN). LANs connect multiple computers together such that the users of the computers can access the same information and share data. Typically, in order to be connected to a LAN, a general purpose computer requires an expansion board generally known as a Network Interface Card (NIC). Essentially, the NIC works with the operating system and Central Processing Unit (CPU) of a host computer to control the flow of information over the LAN. Some NICs may also be used to connect a computer to the Internet.

Typically, NICs are also used to communicate over a LAN communications network standard referred to as Ethernet. It is appreciated that if two NICs coupled to an Ethernet network each try to transmit a packet or frame of data at the same time within a half duplex network, a collision of those packets occurs. As such, each NIC involved in the collision backs off a random amount of time before trying to retransmit their respective data packet. Within the Ethernet network, each half duplex NIC is allowed 16 collisions to transmit a current data packet before discarding it in order to begin transmitting a subsequent data packet. Furthermore, as the number of collisions of a particular data packet increases within the Ethernet network, the half duplex NIC has an increased possibility of backing off for a longer amount time.

It should be appreciated that more and more half duplex NICs can be coupled to the Ethernet network enabling more and more computers to access the same information and share data. But there are disadvantages associated with numerous half duplex NICs being coupled to the Ethernet network. One of the main

disadvantages is that as more and more half duplex NICs are coupled to the Ethernet network, there is an increased possibility of more and more data packet collisions thereby resulting in a more congested network. As such, a half duplex NIC of a particular computer (e.g., file server) which handles a high volume of data packet traffic is unable to efficiently transmit its data packets because of an increased occurrence of data packet collisions.

Accordingly, a need exists for a method and system for providing priority to a half duplex Network Interface Card (NIC) of a particular computer station (e.g., file server) which is coupled to a congested Ethernet network.

DISCLOSURE OF THE INVENTION

5 The present invention provides a method and system for providing priority to a half duplex Network Interface Card (NIC) of a particular computer station (e.g., file server) which is coupled to a congested Ethernet network. Furthermore, the present invention provides a method and system which achieves the above accomplishment and thereby improves the efficiency of data packet transmission over the Ethernet network of the half duplex NIC of the particular computer station.

10 Specifically, one embodiment of the present invention includes a method for providing priority to a peripheral component (e.g., half duplex Network Interface Card) in a congested network. The method includes the step of detecting a collision of a data packet during transmission of the data packet by a peripheral component coupled to a network. Furthermore, the method includes the step of determining a restricted back off time. It should be appreciated that the restricted back off time is substantially
15 equal to or less than a restricted time value. Additionally, the method includes the step of causing the peripheral component to wait the restricted back off time before trying to retransmit the data packet over the network.

20 In another embodiment, the present invention includes a computer system. The computer system includes a processor, an addressable data bus coupled to the processor, and a computer usable memory coupled to communicate with the processor for performing a method for providing priority to a peripheral component

(e.g., half duplex Network Interface Card) coupled to a network. Specifically, the method includes the step of detecting a collision of a data packet during transmission of the data packet by the peripheral component. Moreover, the method includes the step of determining a restricted back off time. It should be appreciated that the restricted back off time is substantially equal to or less than a restricted time value. Furthermore, the method also includes the step of causing the peripheral component to wait the restricted back off time before trying to retransmit the data packet over the network.

In still another embodiment, the present invention includes a computer readable medium having computer readable code embodied therein for causing a peripheral component to perform steps. Specifically, the computer readable medium causes the peripheral component to perform the step of detecting a collision of a data packet during transmission of the data packet by the peripheral component coupled to a network. Additionally, the computer readable medium causes the peripheral component to perform the step of determining a restricted back off time. It should be appreciated that the restricted back off time is substantially equal to or less than a restricted time value. Moreover, the computer readable medium causes the peripheral component to perform the step of causing the peripheral component to wait the restricted back off time before trying to retransmit the data packet over the network.

These and other advantages of the present invention will no doubt become obvious to those of ordinary skill in the art after having read the following detailed description of the preferred embodiments which are illustrated in the drawing figures.

3COM-2496.IPG.US.P

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and form a part of this specification, illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention:

FIGURE 1 is a block diagram of an exemplary computer system used in accordance with one embodiment of the present invention.

FIGURE 2 is a block diagram of an Ethernet network used in accordance with one embodiment of the present invention.

FIGURE 3 is a schematic diagram of a back off time restrictor circuit implemented as part of half duplex Network Interface Card (NIC) in accordance with one embodiment of the present invention.

FIGURE 4 is a flowchart of steps performed in accordance with one embodiment of the present invention for providing priority to a half duplex Network Interface Card (NIC) of a particular computer station which is coupled to an Ethernet network.

The drawings referred to in this description should not be understood as being drawn to scale except if specifically noted.

BEST MODE FOR CARRYING OUT THE INVENTION

Reference will now be made in detail to the preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings. While the invention will be described in conjunction with the preferred embodiments, it will be understood that they are not intended to limit the invention to these embodiments. On the contrary, the invention is intended to cover alternatives, modifications and equivalents, which may be included within the spirit and scope of the invention as defined by the appended claims. Furthermore, in the following detailed description of the present invention, numerous specific details are set forth in order to provide a thorough understanding of the present invention. However, it will be obvious to one of ordinary skill in the art that the present invention may be practiced without these specific details. In other instances, well known methods, procedures, components, and circuits have not been described in detail as not to unnecessarily obscure aspects of the present invention.

Some portions of the detailed descriptions which follow are presented in terms of procedures, logic blocks, processing, and other symbolic representations of operations on data bits within a computer memory. These descriptions and representations are the means used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art. In the present application, a procedure, logic block, process, etc., is conceived to be a self-consistent sequence of steps or instructions leading to a desired result. The steps are

those requiring physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated in a computer system. It has proved convenient at times, principally for reasons of common
5 usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the like.

It should be borne in mind, however, that all of these and similar terms are to be associated with the appropriate physical quantities and are merely convenient labels applied to these quantities. Unless specifically stated otherwise as apparent from the following discussions, it is appreciated that throughout the present invention, discussions utilizing terms such as "detecting", "determining", "causing", "generating", "receiving", "using", "transmitting" or the like, refer to the actions and processes of a computer system, or similar electronic computing device. The computer system or
10 similar electronic computing device manipulates and transforms data represented as physical (electronic) quantities within the computer system's registers and memories into other data similarly represented as physical quantities within the computer system memories or registers or other such information storage, transmission, or display devices. The present invention is also well suited to the use of other computer
15 systems such as, for example, optical and mechanical computers.

COMPUTER SYSTEM ENVIRONMENT OF THE PRESENT INVENTION

With reference now to Figure 1, portions of the present method and system are comprised of computer-readable and computer-executable instructions which reside, for example, in computer-usable media of a computer system. Figure 1 illustrates an exemplary computer system 100 used to perform the present invention. It is appreciated that system 100 of Figure 1 is only exemplary and that the present invention can operate within a number of different computer systems including general purpose networked computer systems, embedded computer systems, stand alone computer systems, and the like.

System 100 of Figure 1 includes an address/data bus 102 for communicating information, and a central processor unit 104 coupled to bus 102 for processing information and instructions. Central processor unit 104 may be an 80x86-family microprocessor or any other type of processor. System 100 also includes data storage features such as a computer usable volatile memory 106 (e.g., random access memory, static RAM, dynamic RAM, etc.) coupled to bus 102 for storing information and instructions for central processor unit 104, computer usable non-volatile memory unit 108 (e.g., read only memory, programmable ROM, flash memory, EPROM, EEPROM, etc.) coupled to bus 102 for storing static information and instructions for the central processor unit 104, and a data storage unit 110 (e.g., a magnetic or optical disk and disk drive) coupled to bus 102 for storing information and instructions. System 100 of the present invention also includes an optional alphanumeric input device 112, which includes alphanumeric and function keys, is coupled to bus 102 for

communicating information and command selections to central processor unit 104.
System 100 also optionally includes a cursor control device 114 coupled to bus 102
for communicating user input information and command selections to central
processor unit 104. System 100 of the present embodiment also includes an optional
display device 116 coupled to bus 102 for displaying information.

Referring still to Figure 1, optional display device 116 may be a liquid crystal
device, cathode ray tube, or other display device suitable for creating graphic images
and alphanumeric characters recognizable to a user. Optional cursor control device
114 allows the computer user to dynamically signal the two dimensional movement of
a visible symbol (e.g., cursor) on a display screen of display device 116. Many
implementations of cursor control device 114 are known in the art including a mouse,
trackball, touch pad, joystick or special keys on alphanumeric input device 112
capable of signaling movement of a given direction or manner of displacement.
Alternatively, it is appreciated that a cursor can be directed and/or activated via input
from alphanumeric input device 112 using special keys and key sequence commands.
The present invention is also well suited to directing a cursor by other means such as,
for example, voice commands. A more detailed discussion of the method and system
embodiments of the present invention are found below.

With reference still to Figure 1, a half duplex Network Interface Card (NIC) 118
in accordance with one embodiment of the present invention coupled to bus 102 is
connected to a network 120 and controls the flow of information of computer system

100 over network 120. Specifically, data packets, such as Ethernet packets, that are incoming and outgoing via network 120 are transmitted and received by half duplex NIC 118. Furthermore, a back off time restrictor circuit 140 in accordance with one embodiment of the present invention is implemented as part of half duplex NIC 118. A more detailed discussion of half duplex NIC 118 and back off time restrictor circuit 140 in furtherance of the present invention is found below. It should be appreciated that the present invention is well suited for other types of Network Interface Cards and is not strictly limited to a half duplex Network Interface Card.

DETAILED DESCRIPTION OF THE STRUCTURE AND OPERATION OF THE PRESENT INVENTION

In the following description of embodiments of the present invention, a Network Interface Card is a peripheral component. Although the present embodiments specifically recite a Network Interface Card, the present invention is also well suited to an embodiment employing various other peripheral components. That is, the present invention is well suited to an embodiment in which the peripheral component is, for example, a PCMCIA (personal computer memory card international association) card. Similarly, the present invention is well suited to an embodiment in which the peripheral component is, for example, a compact form factor I/O (input/output) card. Additionally, the present invention is well suited to use in an embodiment in which the peripheral component is, for example, a rate controller, a small computer system interface (SCSI) controller, a graphics card, and the like. Furthermore, the present invention is well suited to be used, for example, in a non-peripheral component

environment such as an Application Specific Integrated Circuit (ASIC) disposed on a motherboard, an embedded circuit, and the like.

As previously mentioned above, the present invention provides a method and system for providing priority to a half duplex Network Interface Card (NIC) of a particular computer station (e.g., file server) which is coupled to a congested Ethernet network. Within one embodiment in accordance with the present invention, this is accomplished by specifically restricting the length of time of all or a portion of the back off times corresponding to data packet collisions of the half duplex NIC. As such, the half duplex NIC potentially waits for a shorter amount of time before attempting to retransmit a particular data packet as compared to other typical half duplex NICs coupled to the Ethernet network. In this manner, the half duplex NIC in accordance with the present invention has priority within the congested Ethernet network. Furthermore, the present invention improves the efficiency of data packet transmission over the Ethernet network of the half duplex NIC of the particular computer station.

With reference now to Figure 2, which is a block diagram of an Ethernet network 120 used in accordance with one embodiment of the present invention. It should be appreciated that the present invention is not strictly limited to operation within Ethernet network 120. On the contrary, the present invention is well suited for operation within different types of communication networks. As such, Ethernet network 120 is an exemplary network used in accordance with one embodiment of the present invention. Within Figure 2, it is appreciated that computer station 100 of Figure 1 is coupled to

and is part of Ethernet network 120. Specifically, half duplex NIC 118 of computer station 100 is coupled to a hub 216 of Ethernet network 120. The operation and functionality of hub 216 is well known by those of ordinary skill in the art. Moreover, half duplex NICs 222-234 of computer stations 202-214, respectively, are each coupled to hub 216. By coupling half duplex NICs 222-234 and 118 in this manner, users of computer stations 202-214 and 100 have access to the same information and are able to share data within Ethernet network 120.

Within Ethernet network 120, it is appreciated that if two or more of half duplex NICs 222-234 and 118 try to transmit a data packet or frame at the same time, a collision of those packets will occur. As such, each half duplex NIC involved in the collision backs off a random amount of time before trying to retransmit their respective data packet. Each one of half duplex NICs 222-234 and 118 is allowed 16 collisions to transmit a particular data packet before discarding it in order to begin transmitting a subsequent data packet. Additionally, as the number of collisions of a particular data packet increases up to the value of 10, half duplex NICs 222-234 have an increased possibility of backing off for a longer amount time. As to this particular functionality, it is important to note that half duplex NIC 118 of computer station 100 does not operate in the same manner as half duplex NICs 222-234 of computer stations 202-214.

Specifically, as the number of collisions of a particular data packet increases for half duplex NIC 118 of Figure 2, one embodiment in accordance with the present invention implements a shorter restricted time value for the back off times as compared

to the back off times of half duplex NICs 222-234. As such, the back off times of half duplex NIC 118 are substantially equal to or less than the shorter restricted time value. In this manner, half duplex NIC 118 potentially waits for a shorter amount of time before attempting to retransmit a particular data packet as compared to half duplex NICs 222-234 of Ethernet network 120. As such, half duplex NIC 118 achieves transmission priority over half duplex NICs 222-234 of computer stations 202-214 within Ethernet network 120.

Referring now to Figure 3, which is a schematic diagram of a back off time restrictor circuit 140 implemented as part of half duplex NIC 118, in accordance with one embodiment of the present invention. It should be appreciated that the present invention is not strictly limited to the embodiment shown as back off time restrictor circuit 140. Therefore, the present invention is well suited for a variety of different embodiments for performing the functionality of back off time restrictor circuit 140. As such, back off time restrictor circuit 140 is an exemplary circuit used in accordance with one embodiment of the present invention. The main function of back off time restrictor circuit 140 is to restrict or shorten the length of time of all or a portion of the back off times of half duplex NIC 118. Therefore, half duplex NIC 118 potentially waits for a shorter amount of time before attempting to retransmit a particular data packet as compared to half duplex NICs 222-234. In this fashion, back off time restrictor circuit 140 causes half duplex NIC 118 to have transmission priority over half duplex NICs 222-234 within Ethernet network 120.

Generally, when half duplex NIC 118 detects a collision of a data packet that it is transmitting, back off time restrictor circuit 140 receives a random number signal 310 which is stored within a random number register 302. Additionally, a predetermined mask signal 312 is stored within a mask register 304. The mask signal 312 and the random number signal 310 are input into a logical AND gate 306, where they are bit-wise ANDed together to produce a masked number signal 314. Within the present embodiment, the function of mask signal 312 is to mask or restrict the value of the resulting masked number signal 314, which subsequently results in a shorter back off time for half duplex NIC 118. The masked number signal 314 is stored within a masked number register 308. The restricted value represented by masked number signal 314 is subsequently used by half duplex NIC 118 to determine its back off time for the corresponding data packet collision. As such, the determined back off time of half duplex NIC 118 is restricted to a shorter amount of time. Therefore, half duplex NIC 118 potentially waits for a shorter amount of time before attempting to retransmit a particular data packet as compared to half duplex NICs 222-234 of Figure 2.

Specifically, with reference still to Figure 3, when half duplex NIC 118 detects a collision of a data packet that it is transmitting, a random number generator function (not shown) produces random number signal 310. Within the present embodiment, the determination of the value of random number signal 310 by the random number generator function complies with the 802.3 specification of the Institute of Electrical and Electronics Engineers (IEEE). Specifically, X is equal to the number of collisions of the data packet while Y is equal to the value of X or 10, whichever has a smaller

value. The random number generator function then determines the value of random number signal 310 by randomly choosing an integer value N which is within the value range of 1 to 2^Y , inclusively. For example, if X is equal to the value of 5, then Y is equal to the value of 5, since 5 has a smaller value than 10. The random number generator function then determines the value of random number signal 310 by randomly choosing the integer value of 15, which is within the value range of 1 to 32, inclusively. It should be appreciated that determining a random number value in this fashion is part of the 802.3 specification of the IEEE, which is well known by those of ordinary skill in the art.

Within the present embodiment, a random number register 302, which is a 16 bit register, is coupled to receive the random number signal 310 from the random number generator function. Upon receiving random number signal 310, the random number register 302 temporarily stores it. Furthermore, predetermined mask signal 312 is stored within mask register 304, which is also a 16 bit register. The outputs of random number register 302 and mask register 304 are coupled to inputs of AND gate 306. As such, mask signal 312 and random number signal 310 are output to AND gate 306, where they are bit-wise ANDed together to produce masked number signal 314. It should be understood that the determined length of the back off time of half duplex NIC 118 is directly related to the value of masked number signal 314. Specifically, as the value of masked number signal 314 becomes smaller, the determined back off time becomes shorter. It should be further appreciated that mask signal 312 of the present embodiment is specifically used to mask part or all of the bits

of the random number signal 310 in order to produce the masked number signal 314 having a predetermined value limit. In other words, mask signal 312 is used by the present embodiment to establish an upper value limit for the resulting masked number signal 314.

5

For example, in order to restrict the value of the masked number signal 314 to the value of the 4 least significant bits of random number signal 310, the 12 most significant bits of mask signal 312 are set equal to zero while its 4 least significant bits are set equal to 1. In this manner, AND gate 306 produces a masked number signal 314 equal to the value of the 4 least significant bits of random number signal 310. As such, mask signal 312 was used by the present embodiment to mask out the 12 most significant bits of random number signal 310 in order to produce masked number signal 314. Within another example, if all 16 bits of mask signal 312 are equal to zero, AND gate 306 produces a masked number signal 314 having a value equal to zero. Therefore, it is appreciated that the mask signal 312 of the present embodiment can be utilized to restrict the value of the masked number signal 314 to the value of any predetermined number of bits of random number signal 310.

15

20

Referring still to Figure 3, the outputs of AND gate 306 are coupled to inputs of masked number register 308. As such, masked number signal 314 is output by AND gate 306 to masked number register 308, which is a 16 bit register. Masked number register 308 outputs the restricted value represented by masked number signal 314 to half duplex NIC 118. In order to determine the length of its back off time, half duplex

NIC 118 of the present embodiment multiplies the value of masked number signal 314 by 512 clock cycles. The resulting number of clock cycles is the determined length of time for the back off time of half duplex NIC 118. As such, the determined back off time of half duplex NIC 118 is restricted to a shorter amount of time.

5

With reference now to Figure 4, a flowchart 400 of steps performed in accordance with one embodiment of the present invention for providing priority to a half duplex Network Interface Card (NIC) of a particular computer station (e.g., file server) which is coupled to an Ethernet network is shown. Flowchart 400 includes processes of the present invention which, in one embodiment, are carried out by a processor and electrical components under the control of computer readable and computer executable instructions. The computer readable and computer executable instructions reside, for example, in data storage features such a computer usable volatile memory unit 104 and/or computer usable non-volatile memory unit 106 of Figure 1. Although specific steps are disclosed in flowchart 400 of Figure 4, such steps are exemplary. That is, the present invention is well suited to performing various other steps or variations of the steps recited in Figure 4.

10

15

20

At step 402, in one embodiment of the present invention, a collision of a data packet is detected during transmission of the data packet over a half duplex Ethernet network. It should be appreciated that step 402 of the present embodiment can be performed by a half duplex NIC coupled to the Ethernet network. Furthermore, it

should be appreciated that the present embodiment is well suited to have a peripheral component perform step 402.

In step 404 of Figure 4, in one embodiment of the present invention, a restricted back off time is determined by the half duplex NIC. It should be appreciated that the restricted back off time is substantially equal to or less than a restricted time value. Within the present embodiment, the restricted back off time is based on a number generated by a random number generator function. It is further appreciated that the determined restricted back off time is subsequently used during a later step of flowchart 200.

At step 406, in one embodiment of the present invention, the half duplex NIC waits for the determined restricted back off time before trying to retransmit the data packet over the half duplex Ethernet network. It should be appreciated that the smaller the restricted back off time is, the smaller the amount of time the half duplex NIC will wait before trying to retransmit the data packet over the Ethernet network.

At step 408 of Figure 4, in one embodiment of the present invention, the half duplex NIC tries to retransmit the data packet over the Ethernet network. After completing step 408, the present embodiment of flowchart 400 is exited.

Thus, the present invention provides a method and system for providing priority to a half duplex Network Interface Card (NIC) of a particular computer station (e.g., file

server) which is coupled to a congested Ethernet network. Furthermore, the present invention provides a method and system which achieves the above accomplishment and thereby improves the efficiency of data packet transmission over the Ethernet network of the half duplex NIC of the particular computer station.

5

The foregoing descriptions of specific embodiments of the present invention have been presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed, and obviously many modifications and variations are possible in light of the above teaching. The embodiments were chosen and described in order to best explain the principles of the invention and its practical application, to thereby enable others skilled in the art to best utilize the invention and various embodiments with various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the Claims appended hereto and their equivalents.

10

15

CLAIMS

What is claimed is:

5 1. A method for providing priority to a peripheral component in a congested network, said method comprising the steps of:

 (a) detecting a collision of a data packet during transmission of said data packet by a peripheral component coupled to a network;

 (b) determining a restricted back off time, wherein said restricted back off time is substantially equal to or less than a restricted time value; and

 (c) causing said peripheral component to wait said restricted back off time before trying to retransmit said data packet over said network.

10 2. The method for providing priority to a peripheral component in a congested network as described in Claim 1, wherein said step (a) comprises:

 detecting said collision of said data packet during transmission of said data packet by said peripheral component coupled to said network, wherein said peripheral component comprises a Network Interface Card (NIC).

15 3. The method for providing priority to a peripheral component in a congested network as described in Claim 1, wherein said step (a) comprises:

20 3. The method for providing priority to a peripheral component in a congested network as described in Claim 1, wherein said step (a) comprises:

detecting said collision of said data packet during transmission of said data packet by said peripheral component coupled to said network, wherein said peripheral component comprises a half duplex Network Interface Card (NIC).

5 4. The method for providing priority to a peripheral component in a congested network as described in Claim 1, wherein said step (a) comprises:

detecting said collision of said data packet during transmission of said data packet by said peripheral component coupled to said network, wherein said network comprises an Ethernet network.

10 5. The method for providing priority to a peripheral component in a congested network as described in Claim 1, wherein said step (a) comprises:

detecting said collision of said data packet during transmission of said data packet by said peripheral component coupled to said network, wherein said network comprises a half duplex Ethernet network.

15 6. The method for providing priority to a peripheral component in a congested network as described in Claim 1, wherein said step (b) comprises:

determining said restricted back off time, wherein said restricted back off time is based on a number generated by a random number generator function.

20 7. The method for providing priority to a peripheral component in a congested network as described in Claim 1, wherein said step (b) comprises:

determining said restricted back off time, wherein said restricted back off time is associated with an Ethernet network.

8. A computer system comprising:

a processor;

an addressable data bus coupled to said processor;

a computer usable memory coupled to communicate with said processor for performing a method for providing priority to a peripheral component coupled to a network, said method comprising the steps of:

(a) detecting a collision of a data packet during transmission of said data packet by said peripheral component;

(b) determining a restricted back off time, wherein said restricted back off time is substantially equal to or less than a restricted time value; and

(c) causing said peripheral component to wait said restricted back off time before trying to retransmit said data packet over said network.

9. The computer system as described in Claim 8 wherein said peripheral component comprises a Network Interface Card (NIC).

10. The computer system as described in Claim 8 wherein said peripheral component comprises a half duplex Network Interface Card (NIC).

11. The computer system as described in Claim 8 wherein said network comprises an Ethernet network.

12. The computer system as described in Claim 8 wherein said network comprises a half duplex Ethernet network.

13. The computer system as described in Claim 8 wherein said step (b) comprises:

determining said restricted back off time, wherein said restricted back off time is based on a number generated by a random number generator function.

14. The computer system as described in Claim 8 wherein said step (b) comprises:

determining said restricted back off time, wherein said restricted back off time is associated with an Ethernet network.

15. A computer readable medium having computer readable code embodied therein for causing a peripheral component to perform the steps of:

(a) detecting a collision of a data packet during transmission of said data packet by said peripheral component coupled to a network;

(b) determining a restricted back off time, wherein said restricted back off time is substantially equal to or less than a restricted time value; and

(c) causing said peripheral component to wait said restricted back off time before trying to retransmit said data packet over said network.

5 16. The computer readable medium as described in Claim 15, wherein said step (a) comprises:

detecting said collision of said data packet during transmission of said data packet by said peripheral component coupled to said network, wherein said peripheral component comprises a Network Interface Card (NIC).

10 17. The computer readable medium as described in Claim 15, wherein said step (a) comprises:

detecting said collision of said data packet during transmission of said data packet by said peripheral component coupled to said network, wherein said peripheral component comprises a half duplex Network Interface Card (NIC).

15 18. The computer readable medium as described in Claim 15, wherein said step (a) comprises:

20 detecting said collision of said data packet during transmission of said data packet by said peripheral component coupled to said network, wherein said network comprises an Ethernet network.

19. The computer readable medium as described in Claim 15, wherein said step (a) comprises:

detecting said collision of said data packet during transmission of said data packet by said peripheral component coupled to said network, wherein said network comprises a half duplex Ethernet network.

5 20. The computer readable medium as described in Claim 15, wherein said step (b) comprises:

 determining said restricted back off time, wherein said restricted back off time is based on a number generated by a random number generator function.

10 21. The computer readable medium as described in Claim 15, wherein said step (b) comprises:

 determining said restricted back off time, wherein said restricted back off time is associated with an Ethernet network.

5
A METHOD AND SYSTEM FOR PROVIDING
PRIORITY TO A STATION IN A CONGESTED
HALF DUPLEX ETHERNET NETWORK

ABSTRACT OF THE DISCLOSURE

10 A method and system for providing priority to a station in a congested half
duplex Ethernet network. Specifically, one embodiment of the present invention
includes a method for providing priority to a peripheral component (e.g., half duplex
Network Interface Card) in a congested network. The method includes the step of
15 detecting a collision of a data packet during transmission of the data packet by a
peripheral component coupled to a network. Furthermore, the method includes the
step of determining a restricted back off time. It should be appreciated that the
restricted back off time is substantially equal to or less than a restricted time value.
Additionally, the method includes the step of causing the peripheral component to wait
20 the restricted back off time before trying to retransmit the data packet over the network.

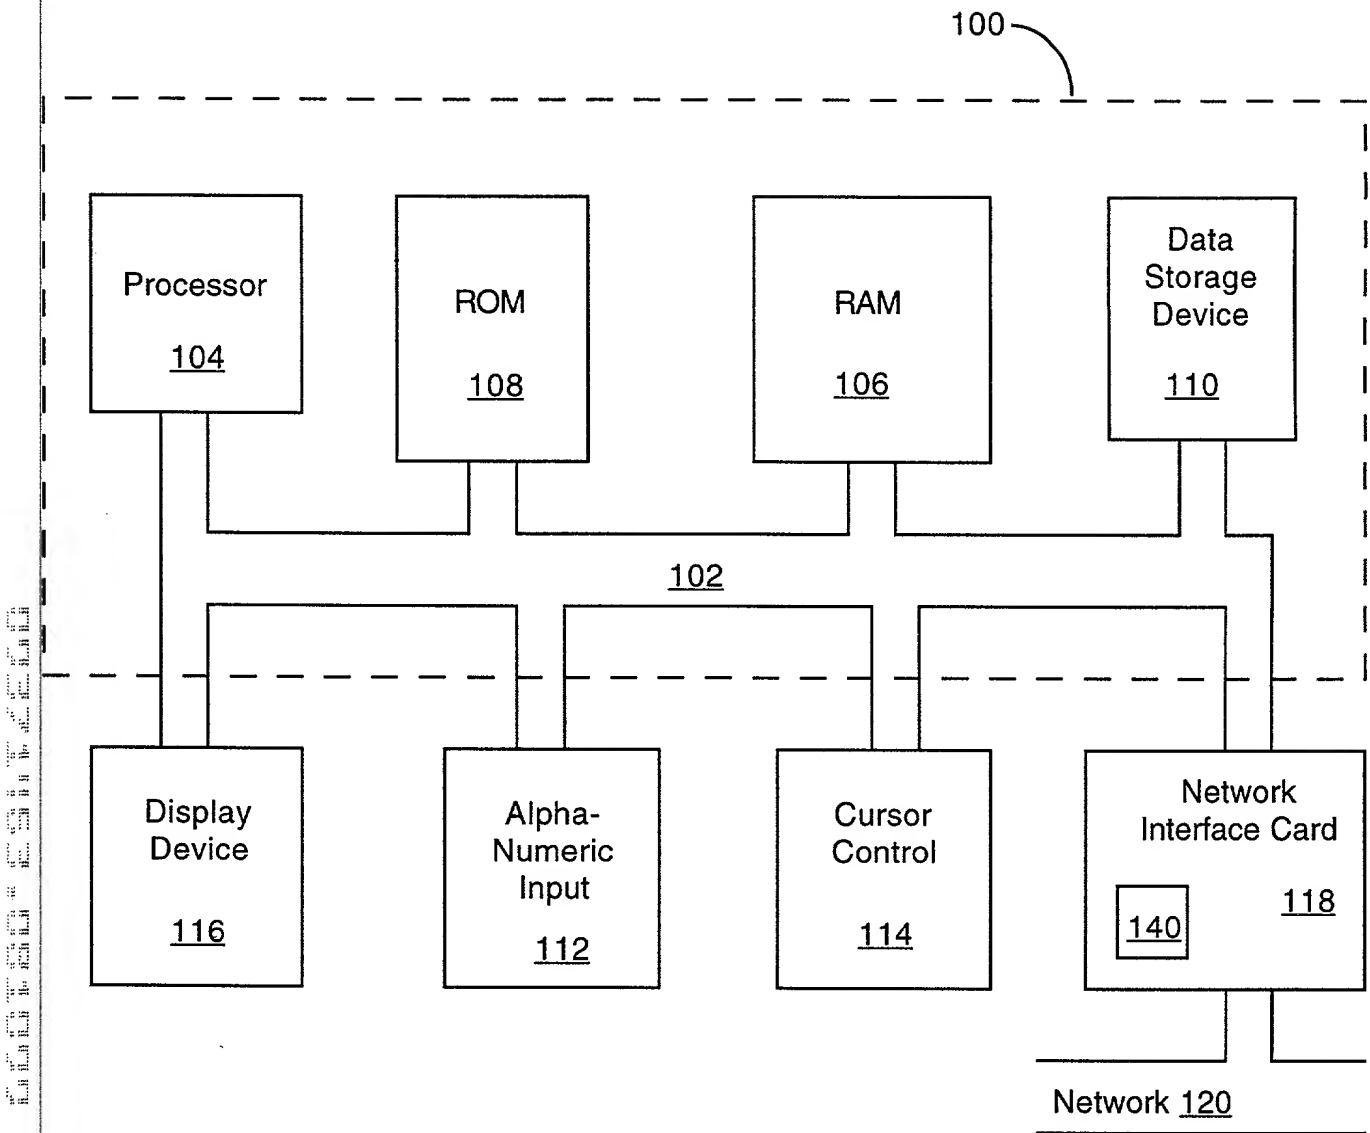


Fig. 1

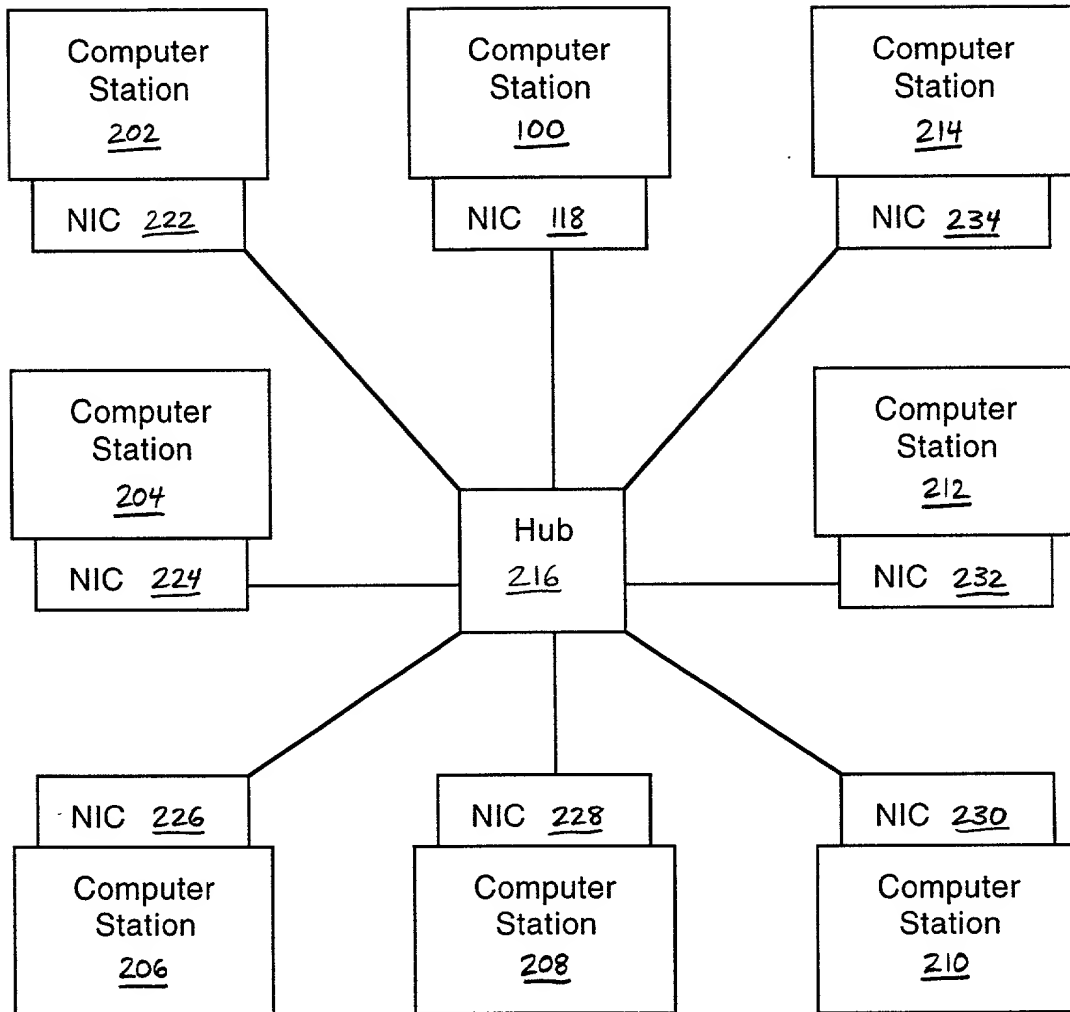


Fig. 2

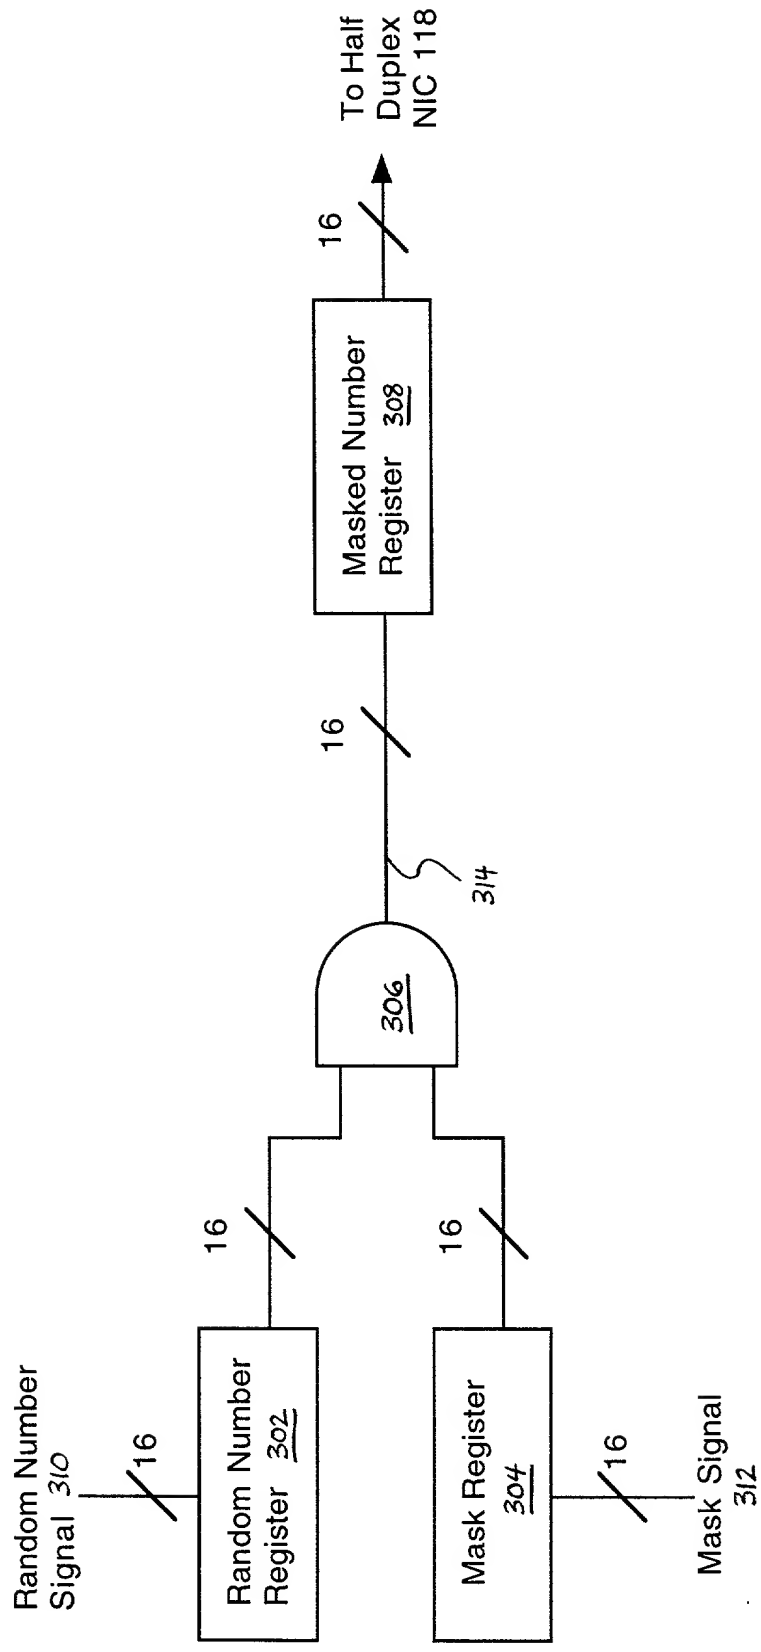


Fig. 3

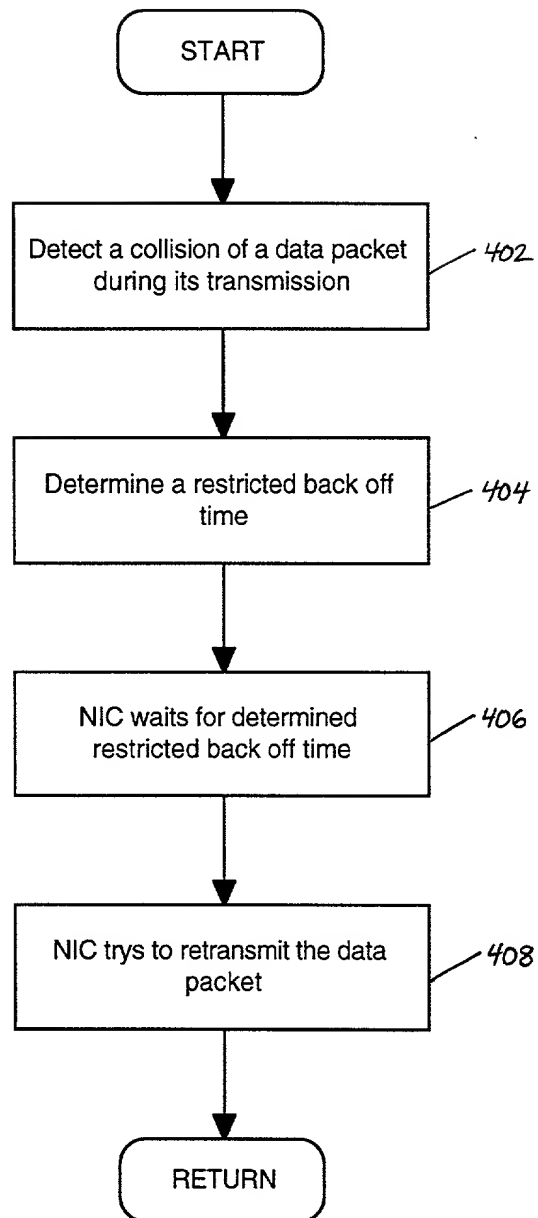


Fig. 4

Declaration and Power of Attorney for a Patent Application

Declaration

As below named inventor, I hereby declare that my residence post office address, and citizenship are as stated below my name. Further, I hereby declare that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A METHOD AND SYSTEM FOR PROVIDING PRIORITY TO A STATION IN A CONGESTED HALF
DUPLEX ETHERNET NETWORK

the specification of which:

☒ is attached hereto, or
..... was filed on as application serial no. : and
..... was amended on

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above; and

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

Foreign Priority Claim

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Number	Country	Date Filed	Priority Claimed
..... yes no
..... yes no

U.S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Serial Number	Filing Date	Status (patented/pending/abandoned)
.....
.....

Power of Attorney

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent Trademark Office connected therewith.

James P. Hao	Registration No.: 36,398
Anthony C. Murabito	Registration No.: 35,295
John P. Wagner	Registration No.: 35,398
Glenn D. Barnes	Registration No.: 42,293
Wilfred H. Lam	Registration No.: 41,923
Patrick W. Ma	Registration No.: 44,215

Send Correspondence to:

WAGNER, MURABITO & HAO LLP
Two North Market Street, Third Floor
San Jose, California 95113
(408) 938-9060

Signatures

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: Glen H. Lowe

Inventor's Signature *Glen H. Lowe* Date 7-14-99
Residence Union City, California Citizenship USA
(City State)
P.O. Address 34774 Rumford Terrace, Union City, CA 94587

Full Name of Second/Joint Inventor: Leslie Thorne

Inventor's Signature *Leslie Thorne* Date 7-14-99
Residence San Jose, California Citizenship USA
(City State)
P.O. Address 5035 Country Lane, San Jose, California 95129

Full Name of Third/Joint Inventor: Gary Takushi

Inventor's Signature *Gary H. Takushi* Date 7/14/99
Residence Milpitas, California Citizenship USA
(City State)
P.O. Address 336 Montecito Way, Milpitas, CA 95035